


MEGAFLEX PULLEYS

MEGAFLEX STANDARD PULLEYS

MEGAFLEX belts can use standard pulleys for every pitch. Standard pulleys have hubs, an available flanged or unflanged, in steel or aluminium.

The most common pulleys on the market suitable for MEGAFLEX are the two following types. MEGADYNE is able to supply special pulleys custom made with specific surface treatment or special working according to the customer drawing.

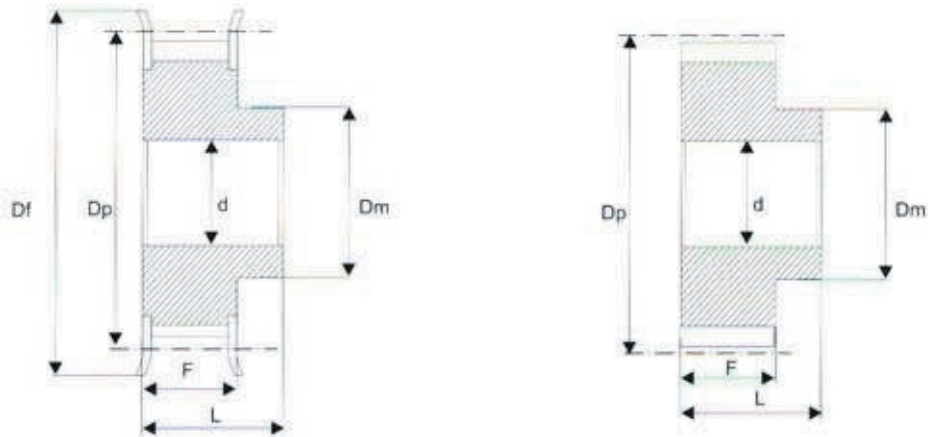

- F = width of toothed face (normally we use width belt +8 mm)
- L = total width of pulley
- Dm = diameter of hub
- d = diameter of hole for the shaft
- Dp = primitive diameter
- Df = flanges diameter

The feasibility tabel on pag. 4 gives the minimum n° of teeth pulley required for each pitch and profile.

CUSTOM MADE PULLEYS CAN BE MADE IN ANY PITCH AND MATERIAL.

