


**Askoppelingen - Taperbus uitvoering**

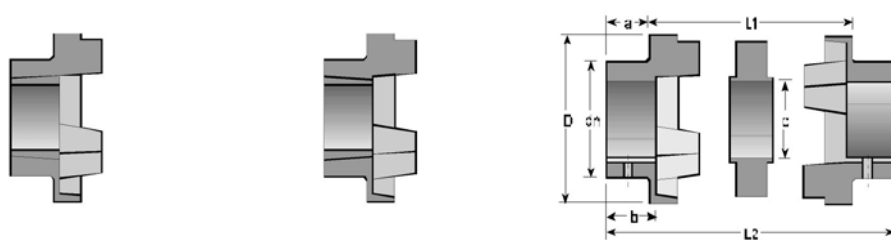

Artikelnr.	Type	Taper- bus	boring min. Max	D	dn	a	b	c	L <sub>1</sub>	L <sub>2</sub> <sup>1)</sup>
------------	------	---------------	--------------------	---	----	---	---	---	----------------	------------------------------

**Askoppelingen - Taperbus uitvoering**

tabel 3 afmetingen in mm, taperbus uitvoering

1006100	Inwendig	<b>7</b>	1008	9	25	69	60	21	24	31	25	65
1006099	Uitwendig	<b>7</b>	1008	9	25	69	60	21	24	31	25	65
1006102	Flexibel element	-	-	-	-	-	-	-	-	-	-	-
1006104	Inwendig	<b>9</b>	1108	9	28	85	70	20	24	32	31	70
1006103	Uitwendig	<b>9</b>	1108	9	28	85	70	20	24	32	31	70
1006106	Flexibel element	-	-	-	-	-	-	-	-	-	-	-
1006108	Inwendig	<b>11</b>	1610	12	42	112	100	19	27	45	45	82
1006107	Uitwendig	<b>11</b>	1610	12	42	112	100	19	27	45	45	82
1006110	Flexibel element	-	-	-	-	-	-	-	-	-	-	-
1006112	Inwendig	<b>13</b>	1610	12	42	130	105	18	27	50	53	89
1006111	Uitwendig	<b>13</b>	1610	12	42	130	105	18	27	50	53	89
1006114	Flexibel element	-	-	-	-	-	-	-	-	-	-	-
1006116	Inwendig	<b>15</b>	2012	14	50	150	115	24	34	62	60	107
1006115	Uitwendig	<b>15</b>	2012	14	50	150	115	24	34	62	60	107
1006118	Flexibel element	-	-	-	-	-	-	-	-	-	-	-
1006120	Inwendig	<b>18</b>	2517	16	65	180	125	35	47	77	73	142
1006119	Uitwendig	<b>18</b>	2517	16	65	180	125	35	47	77	73	142
1006122	Flexibel element	-	-	-	-	-	-	-	-	-	-	-
1006125	Inwendig	<b>23</b>	3020	25	75	225	155	40	53	99	86	165
1006124	Uitwendig	<b>23</b>	3020	25	75	225	155	40	53	99	86	165
1006127	Flexibel element	-	-	-	-	-	-	-	-	-	-	-
1006129	Inwendig	<b>28</b>	3525	28	90	275	206	51	67	119	106	208
1006128	Uitwendig	<b>28</b>	3525	28	90	275	206	51	67	119	106	208
1006131	Flexibel element	-	-	-	-	-	-	-	-	-	-	-

- 1) inbouwmaat bij benadering
- 2) U: Uitwendig monteren
- 3) I : Inwendig monteren

- 3) I-naaf Taperbus inwendige montage
- 2) U-naaf Taperbus uitwendige montage